

BEGA**44 007**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Wall luminaire made of stainless steel and hand-blown opal glass.

A luminaire shielded to the top for a host of lighting applications in interior and exterior design.

Product description

Luminaire back housing made of aluminium alloy

Surround made of stainless steel

Steel grade no. 1.4301

Opal glass

2 mounting holes \varnothing 6,5 mm

Distance apart 85 mm

1 cable entry for mains supply cable

up to \varnothing 10,5 mm

Lampholder terminal 2.5[□]

Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 44

Protected against granular foreign bodies

> 1 mm and splash water

Impact strength IK02

Protection against mechanical

impacts < 0.2 joule

– Safety mark

CE – Conformity mark

Weight: 3.8 kg

Lamp

Luminaire with screw base E 27

Lamp output max. 100 W

Supplied lamp

BEGA LED lamp **13590**

LED 12 W · 1400 lm · 3000 K

Luminaire efficiency: 60%

Additional BEGA LED lamps are available for this luminaire:


13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimmable

13588 LED 8 W · 1055 lm · 3000 K

13592 LED 12 W · 1400 lm · 3000 K
dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

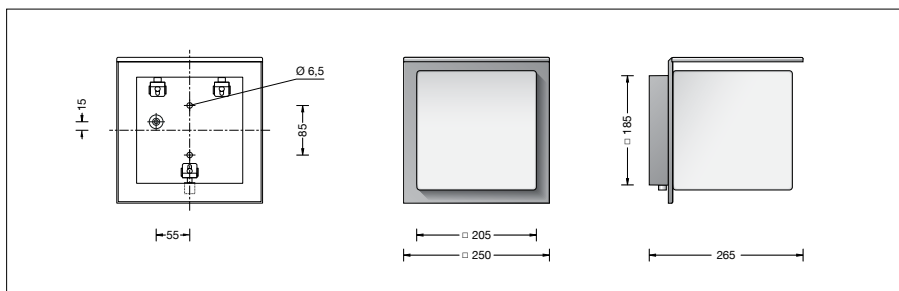

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Light distribution

