




Floor Lamp | 220-240 V  
1 topLED 6.8 W DC - 8 W AC | CRI 80  
**9095**

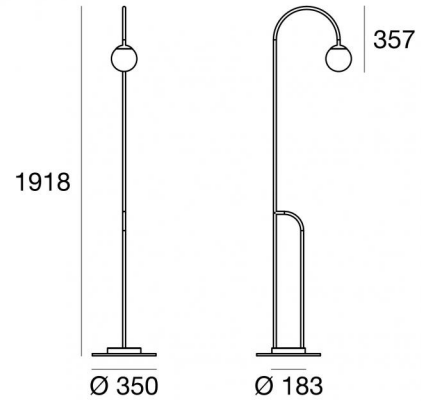

Technical data	
Construction year	2020
Type	Floor Lamp
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward and upward
Power	6.8 W
Source lumens	994 lm
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP65
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2.3 m
Resin potting	No
Type of light emission	Radial diffusion
Net weight	8,600 Kg
Electrostatic discharge protection	No
Surge protection	No

### Finishing casing

Material	Iron
Colour	black RAL 9005
Processing	Coating

### Finishing diffuser

Material	PE
Colour	neutral

### Finishing mounting frame

Material	Iron
Colour	black RAL 9005
Processing	Coating

Floor Lamp | 220-240 V | 1 topLED 6.8 W DC - 8 W AC | CRI 80 | Base 9095

Radial diffusion floor lamp for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 994 lm, with a 146.2 lm/W nominal luminous efficacy.


The device body is made of iron and features a black ral 9005 finish, processed by means of coating; the diffuser is made of pe; the mounting frame is made of iron, with a black ral 9005 finish, processed by means of coating. The ingress protection degree is IP65; the total weight is of 8,600 kg.

The total absorbed power is 7 W. The power supply cable is included and features a 2.3 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	68 %
Source lumens	994 lm
Delivered lumens	676.49 lm
Consumption	8 W
Luminaire efficacy	84 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25
LED Life / Failure Ratio	
L70 B20 C0 72500h	

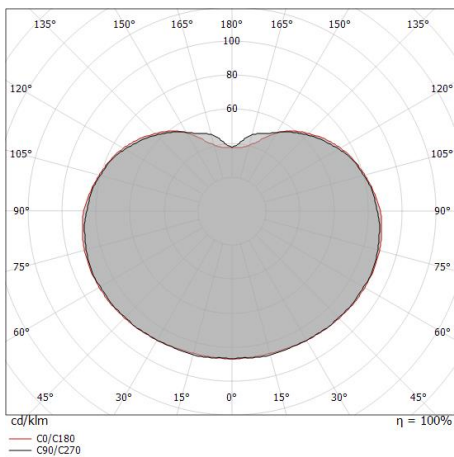



Butler | Floor Lamp | Accessories  
**9095**



Bracket

installation position: pole.

Material:Iron, colour:black, processing:Coating.

**Finish**

Black

**Code**

KIT9095